

双砂辊碾米机
DOUBLE EMERY ROLL WHITENER



湖北永祥粮食机械股份有限公司
HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

碾米机械 永祥制造

用途简介

MNMS25LX2 双砂辊碾米机是永祥根据目前国内外稻米加工实际情况，结合本公司长期研发碾米机的成熟经验，采用现代机械制造工艺和国际化元件配置，精心设计、制造的碾米机升级产品，该机采用双辊水平布局并联使用的结构方式，具有造型美观，结构紧凑，自动化程度高，产量大、精度高、占地面积小，维修方便、进料方式灵活等特点，主要用于糙米开糙和糙米碾白。是现代大中型优质米厂升级换代理想的配套米机。

产品特点

- 整体机架设计，机械结构稳定牢固;
- 双辊采用水平结构布局并联使用，产量大，占地面积小;
- 采用强负压碾米，精度高，碎米少，排糠能力强;
- 出米口拨米辊设计，出料更畅通;
- 电流和负压数字化显示，易观察，操作更方便;
- 配备进料急停装置，能有效防止闷机现象;
- 多转速设计，适于加工不同品种的原粮;
- 多方位排糠设计，配套更方便;
- 双电机驱动，性能更稳定;

USE INTRODUCTION

MNMS25LX2 Double emery roll whitener is to use modern machinery manufacturing technology and international components configuration, the careful design, the manufacture of rice milling machine upgrade the product, the machine uses two parallel roller horizontal layout using the way of structure, beautiful shape, compact structure, high automation degree, large output, high precision, cover an area of an area small, easy maintenance, flexible feed and other characteristics, is mainly used for rough grinding and brown rice white brown rice. It is an ideal matching rice machine for upgrading modern large and medium-sized quality rice factories.

FEATURES

- Overall frame design, stable and firm mechanical structure.
- Double rollers are used in parallel with horizontal structure layout, with large output and small floor space.
- Adopt strong negative pressure milling, high precision, less broken rice, strong ability to remove bran.
- The design of the rice feeding roller at the outlet makes the discharging smoother.
- Digital display of current and negative pressure, easy to observe and more convenient to operate.
- Equipped with feeding emergency stop device, can effectively prevent the phenomenon of sealing machine.
- Multi-speed design, suitable for processing different varieties of raw grains.
- Multi-directional bran removal design, more convenient supporting.
- Double motor drive, more stable performance.


主要技术参数 MAIN TECHNICAL DATA

型号 Type	MNMS25LX2	转速 Rotary speed(rpm)	955-1031
处理量 Output(t/h)	8-12	吸风量 Air volume(m³/min)	70
配备动力 Power(kw)	45+45	负压 Negative pressure(mmH₂O)	150-300

产品技术参数如有变更恕不另行通知 If technologic data has been changed without further information

通过ISO9001国际标准质量体系认证 ISO 9001-2008 Certified
E-mail:yongxiangmiji@sohu.com http://www.hbyxlj.com

地址：湖北省安陆市府河大道2号
ADD: 2 FUHE AVE.,ANLU CITY,HUBEI,CHINA
电话(TEL): 0712-5254443 5254445 5258762 传真(FAX):0712-5254443 邮编(POSTCODE): 432600

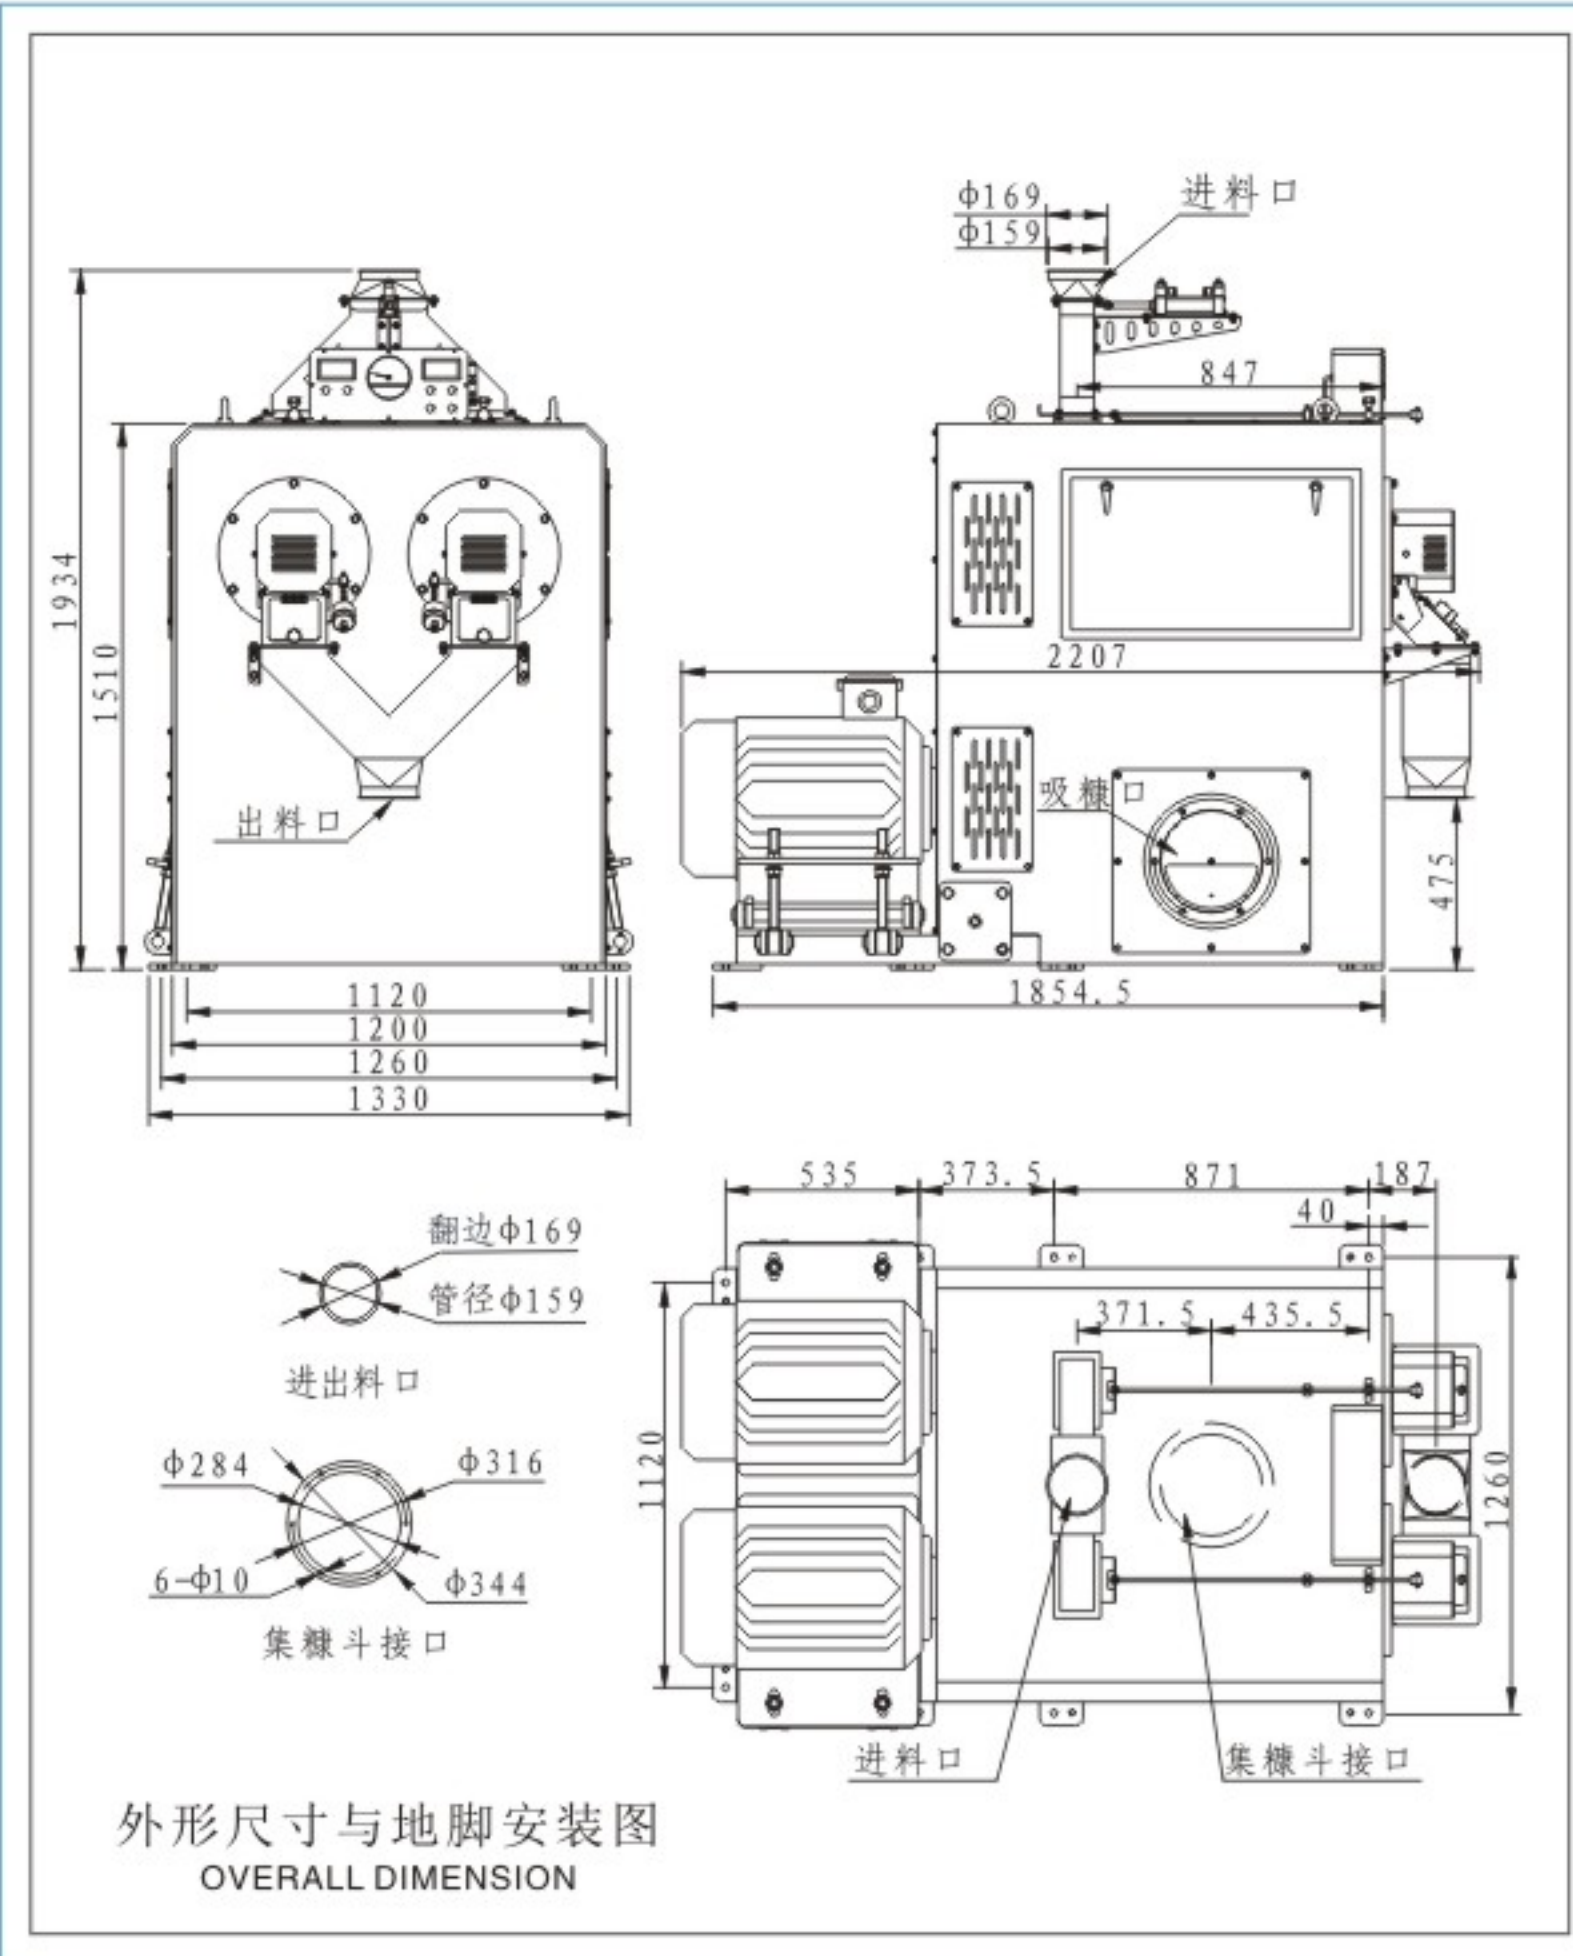

永祥官网



微信公众号