


外形尺寸与地脚安装图 OVERALL DIMENSION

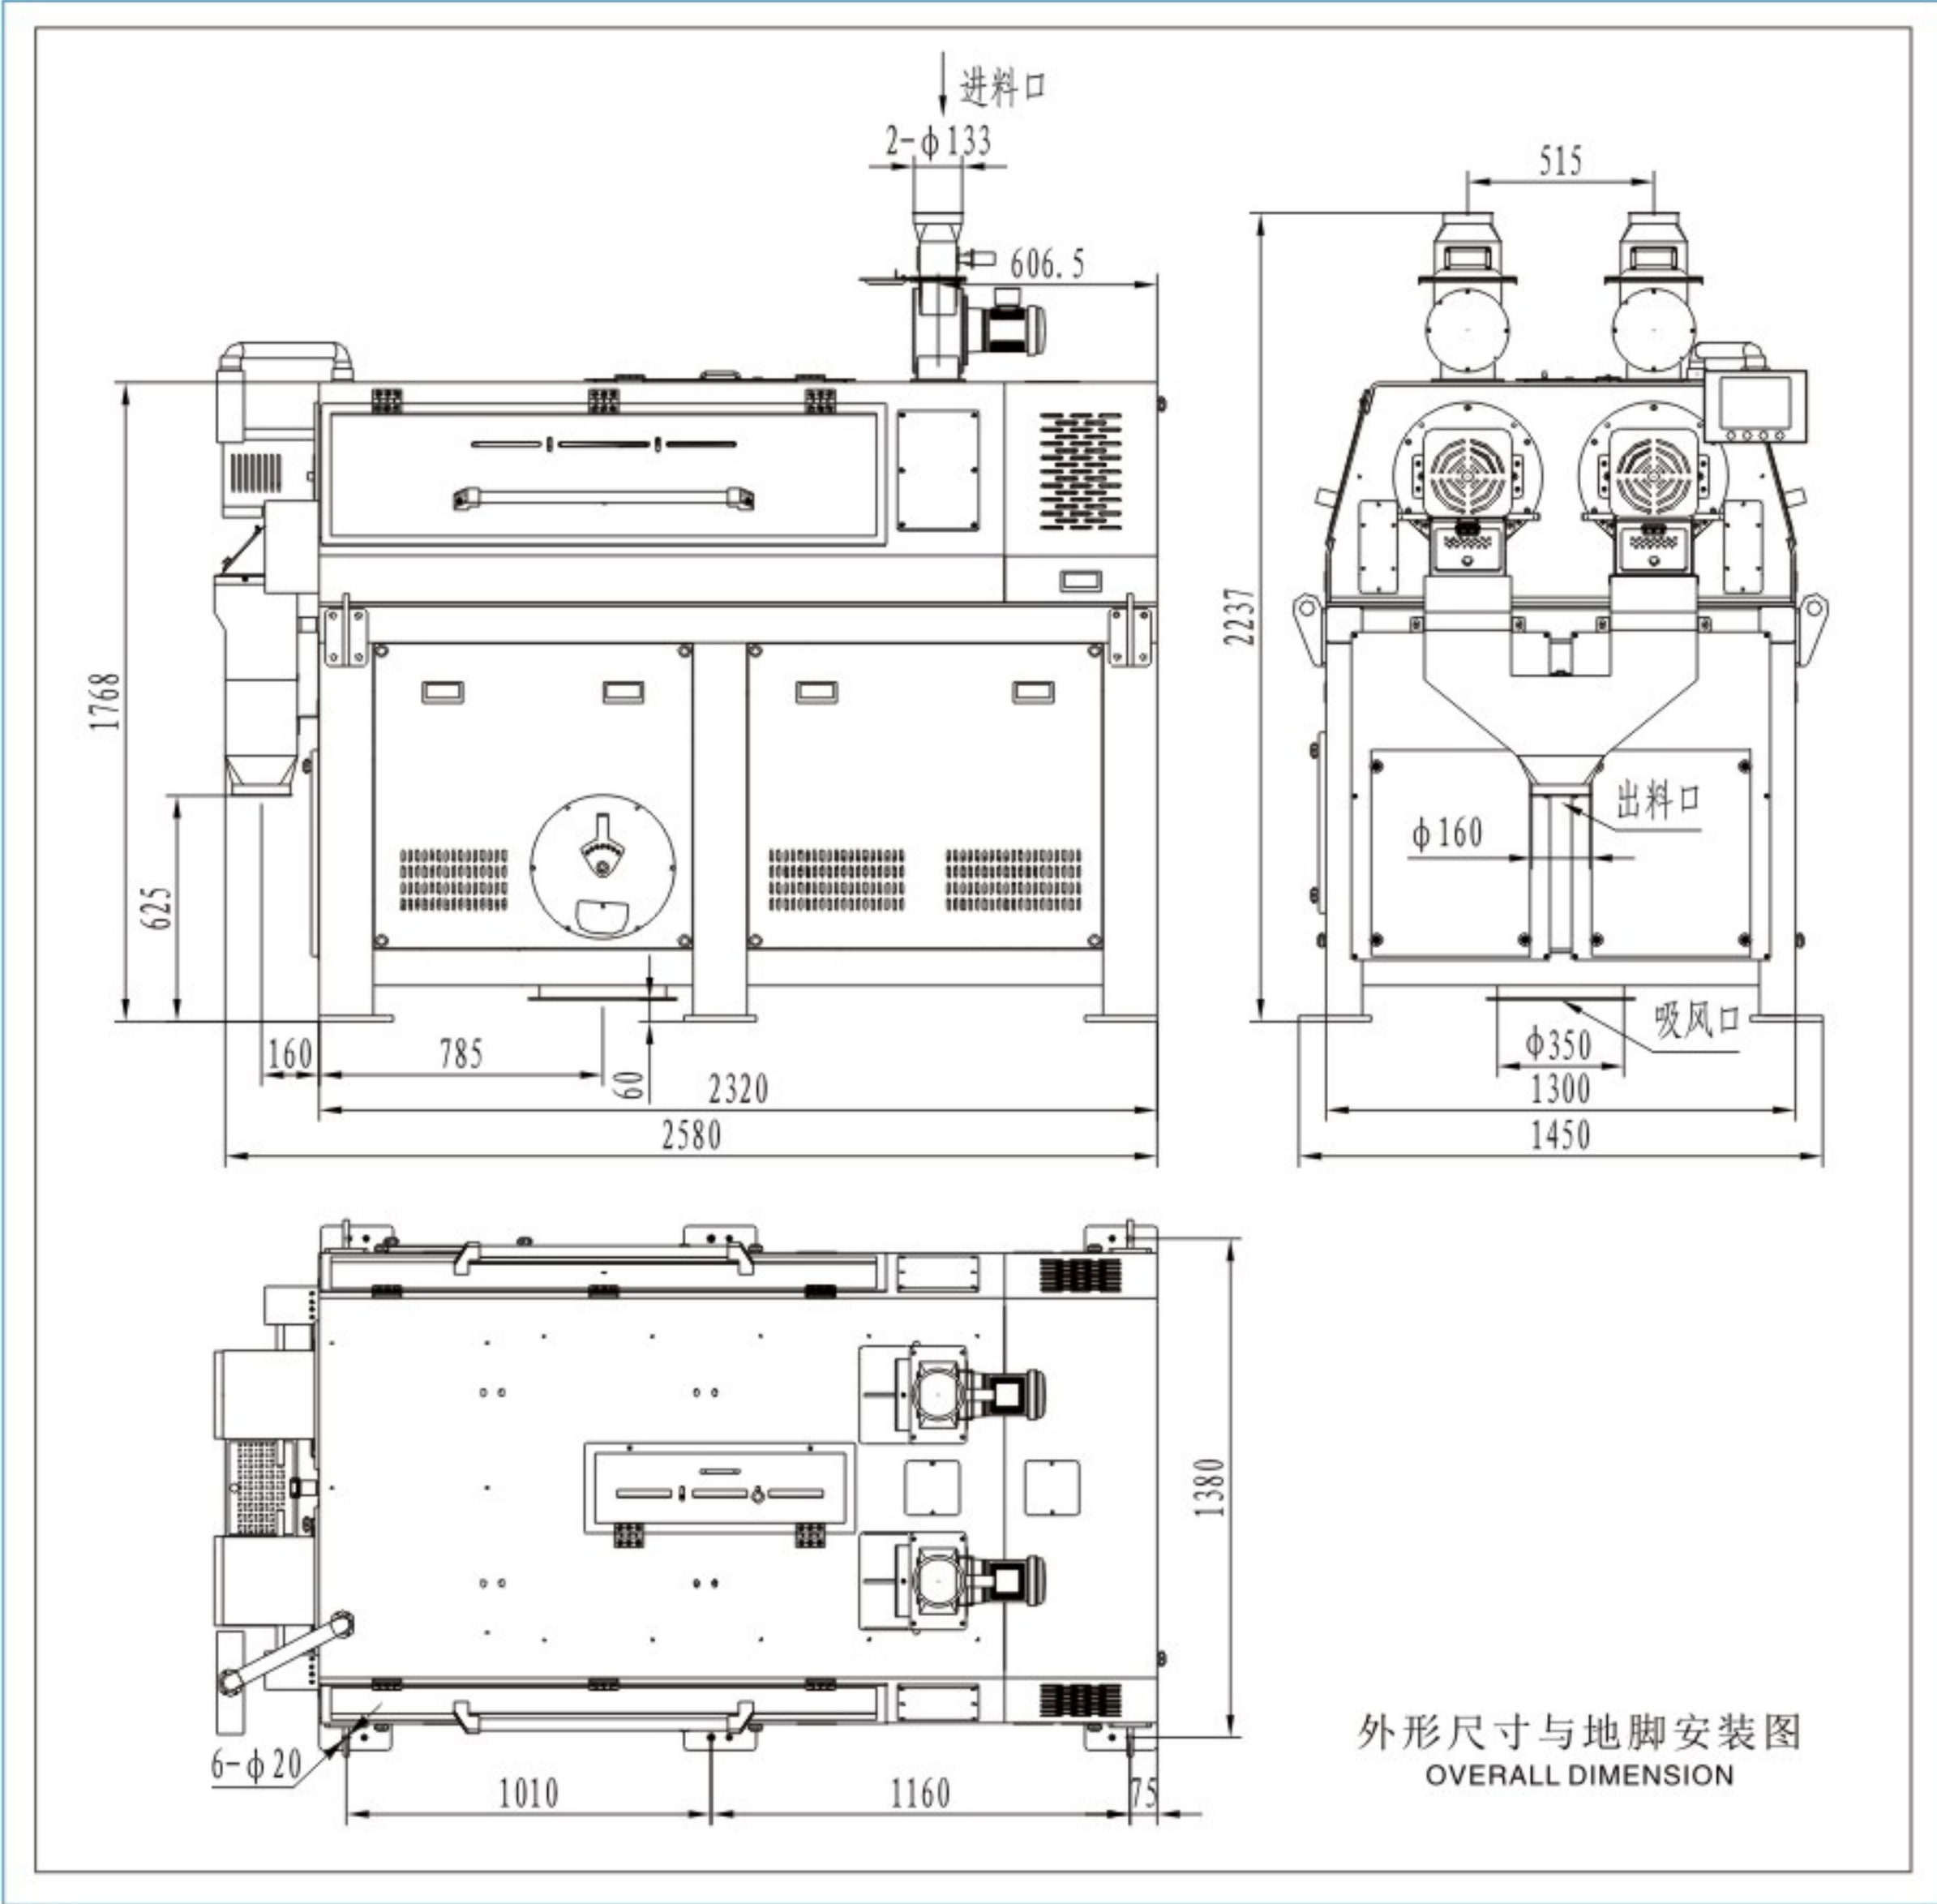

主要技术参数 MAIN TECHNICAL DATA

型号 Type	CM5000SX2L(QZD)
处理量 Output(t/h)	8-10
配备动力 Power(kw)	(45X2)/(55X2)+0.2X2
转速 Rotary speed(rpm)	800
吸风量 Air volume(m³/min)	110-120
负压 Negative pressure(mmH ₂ O)	250-350
外形尺寸 Dimenion(mm)	2580X1450X2237

产品技术参数如有变更恕不另行通知 If technologic data has been changed without further information

通过ISO9001国际标准质量体系认证 ISO 9001 -2008 Certified
E-mail:yongxiangmiji@sohu.com http://www.hbyxlj.com

地址: 湖北省安陆市府河大道2号
ADD: 2 FUHE AVE., ANLU CITY, HUBEI, CHINA
电话(TEL): 0712-5254443 5254445 5258762 传真(FAX): 0712-5254443 邮编(POSTCODE): 432600



永祥官网



微信公众号

CM5000Sx2L(QZD)

全自动大米抛光机

AUTOMATIC RICE POLISHER



湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

用途简介 USE INTRODUCTION

CM5000SX2L(QZD)全自动大米抛光机是永祥集多年研发生产大米抛光机的专业技术，融合现代大米绿色、健康新理念、新标准，精心设计、制造的新型大米抛光机。该机不仅具有结构紧凑、造型美观、单机产量大、占地面积小、适应能力强、坚固耐用等特点，而且采用触摸屏人机界面对话，操作控制便捷，全自动化设计，真正做到运行无人值守，能够满足大中型碾米企业与碾米机组配套使用或者深加工单独使用的需要，是现代品牌化、规模化米业公司理想的更新换代首选产品。

CM5000SX2L(QZD) automatic rice polishing machine is YONGXIANG set many years of research and development of the production of rice polishing machine professional technology, integration of modern rice green Color, health new concept, new standards, carefully designed and manufactured new rice polishing machine. This machine not only has a compact structure, beautiful appearance, single production Large volume, small footprint, strong adaptability, durability and other characteristics, and the use of touch screen man-machine interface dialogue, convenient operation and control, automatic The design, truly unattended operation, can meet the needs of large and medium-sized rice milling enterprises and rice milling units for supporting use or for deep processing alone, is the ideal replacement of the first choice of modern brand, large-scale rice companies.



控制界面
The control interface



旋转喂料器
Rotate the feeder



镜面抛光辊
Mirror polishing roll



触摸屏
Touch screen



全新机架 电机内置
A new frame Motor built-in

产品特点 FEATURES

- 本机全部运行工作过程通过触摸屏智能控制，人机界面对话，可以远程与米厂PLC通讯，远程操作，远程报警，无人值守;
- 由变频电机驱动旋转喂料器进料，并由变频器改变电机频率来控制产量的大小。操作方便，计量准确;
- 镜面抛光辊筒，不易粘糠，减少增碎，提升抛光效果。
- 根据产量的变化，自动调节着水量；自动恒温加水，自动调节出口压力，自动调节风量大小，保证抛光效果;
- 全新机架设计，电机内置，双糠斗排布，既节省空间又增加了设备的稳定性。
- 强弱电箱及水气箱分开；电线、水管等内置，排布规则美观，安全可靠。
- 零部件采用国际名牌元件配置，经久耐用。

- The whole operation process of the machine is intelligently controlled by the touch screen, and the man-machine interface dialogue can be remotely connected with Rice factory PLC communication, remote operation, remote alarm, unattended;
- The variable frequency motor drives the rotary feeder to feed, and the frequency of the motor is changed by the frequency converter to control the output size. easy to operate, accurate measurement;
- Mirror polishing roller, not easy to stick to bran, reduce crushing, improve the polishing effect.
- According to the change of yield, the water volume is automatically adjusted; automatic constant temperature water, automatic adjustment of outlet pressure, automatically adjust the air volume to ensure the polishing effect;
- New frame design, built-in motor, double chaff bucket arrangement, not only save space and increase the stability of the equipment sex.
- Separate the strong and weak electric box and the water and gas box; electric wires, water pipes and other built-in, beautiful arrangement rules, safe and reliable.
- The parts are equipped with international famous brand components, which are durable.

CM5000SX2L(QZD)
AUTOMATIC RICE POLISHER