

用途简介

CM8000X2H大米抛光机是永祥集多年研发生产大米抛光机的专业技术，融合现代大米绿色、健康新理念、新标准，精心设计、制造的大型高产双辊大米抛光机。该机具有结构紧凑、造型美观、单机产量大、占地面积小、适应能力强、坚固耐用、操作维修方便等特点，能够满足大中型碾米企业与碾米机组配套使用或者深加工单独使用的需要，是现代品牌化、规模化米业公司理想的更新换代产品。

产品特点

- 分段抛光辊设计，镜面抛光，既装拆方便，又有效保证了抛光效果；
- 自动恒温加水装置，高压空气喷雾着水，加水稳定均匀；
- 推进器、抛光辊及衬套采用食品级不锈钢制作，耐用少维修，且保证抛光后的米粒细腻光滑；
- 多方位可调风设计，操作方便，又有效控制加工效果；
- 分段筛托架设计，装拆方便，省时省力；
- 气动进料门并设有料门微调机构，料门开关迅速、精确灵敏；
- 多方位排糠设计，配套更方便。

USE INTRODUCTION

CM8000x2H rice polisher is a large rice polisher with high yield, which is designed and manufactured by modern machinery and international components. The machine has compact structure, beautiful shape, large single machine production, cover an area of an area small, strong adaptability, durable and convenient operation and maintenance, etc, can satisfy the deep processing of large and medium-sized rice milling enterprises with milling unit or used alone, is a modern, scale rice brand company's new production.

FEATURES

- Piecewise polishing roller design, mirror polishing, not only easy installation and disassembly, but also effectively ensure the polishing effect.
- Automatic constant temperature water addition device, high pressure air spray water, water addition is stable and uniform.
- Propeller. Polishing roller and bushing are made of food grade stainless steel, durable and less maintenance, and ensure the polished rice grains are fine and smooth.
- Multi-directional adjustable air design, easy to operate, and effectively control the processing effect.
- Segmented screen bracket design, easy installation and disassembly, saving time and effort.
- This machine is equipped with pneumatic feeding door and door fine-tuning, door switch rapid, accurate sensitive.
- Multi-directional bran removal design, more convenient supporting.

主要技术参数 MAIN TECHNICAL DATA

型号 Type	CM8000X2H	转速 Rotary speed(rpm)	650-750
处理量 Output(t/h)	14~18	吸风量 Air volume(m³/min)	60-70
配备动力 Power(kw)	2X75	负压 Negative pressure(mmH ₂ O)	250-350
机重 Weight(kg) 含电机	3800	外形尺寸 Dimenion(mm)	2716x1634x2262.5

产品技术参数如有变更恕不另行通知 If technologic data has been changed without further information

通过ISO9001国际标准质量体系认证 ISO 9001 -2008 Certified

E-mail:yongxiangmiji@sohu.com http://www.hbyxlj.com

地址：湖北省安陆市府河大道2号

ADD: 2 FUHE AVE., ANLU CITY, HUBEI, CHINA

电话(TEL): 0712-5254443 5254445 5258762 传真(FAX):0712-5254443 邮编(POSTCODE): 432600



永祥官网



微信公众号


大米抛光机
RICE POLISHER



湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

外形尺寸与地脚安装图 OVERALL DIMENSION

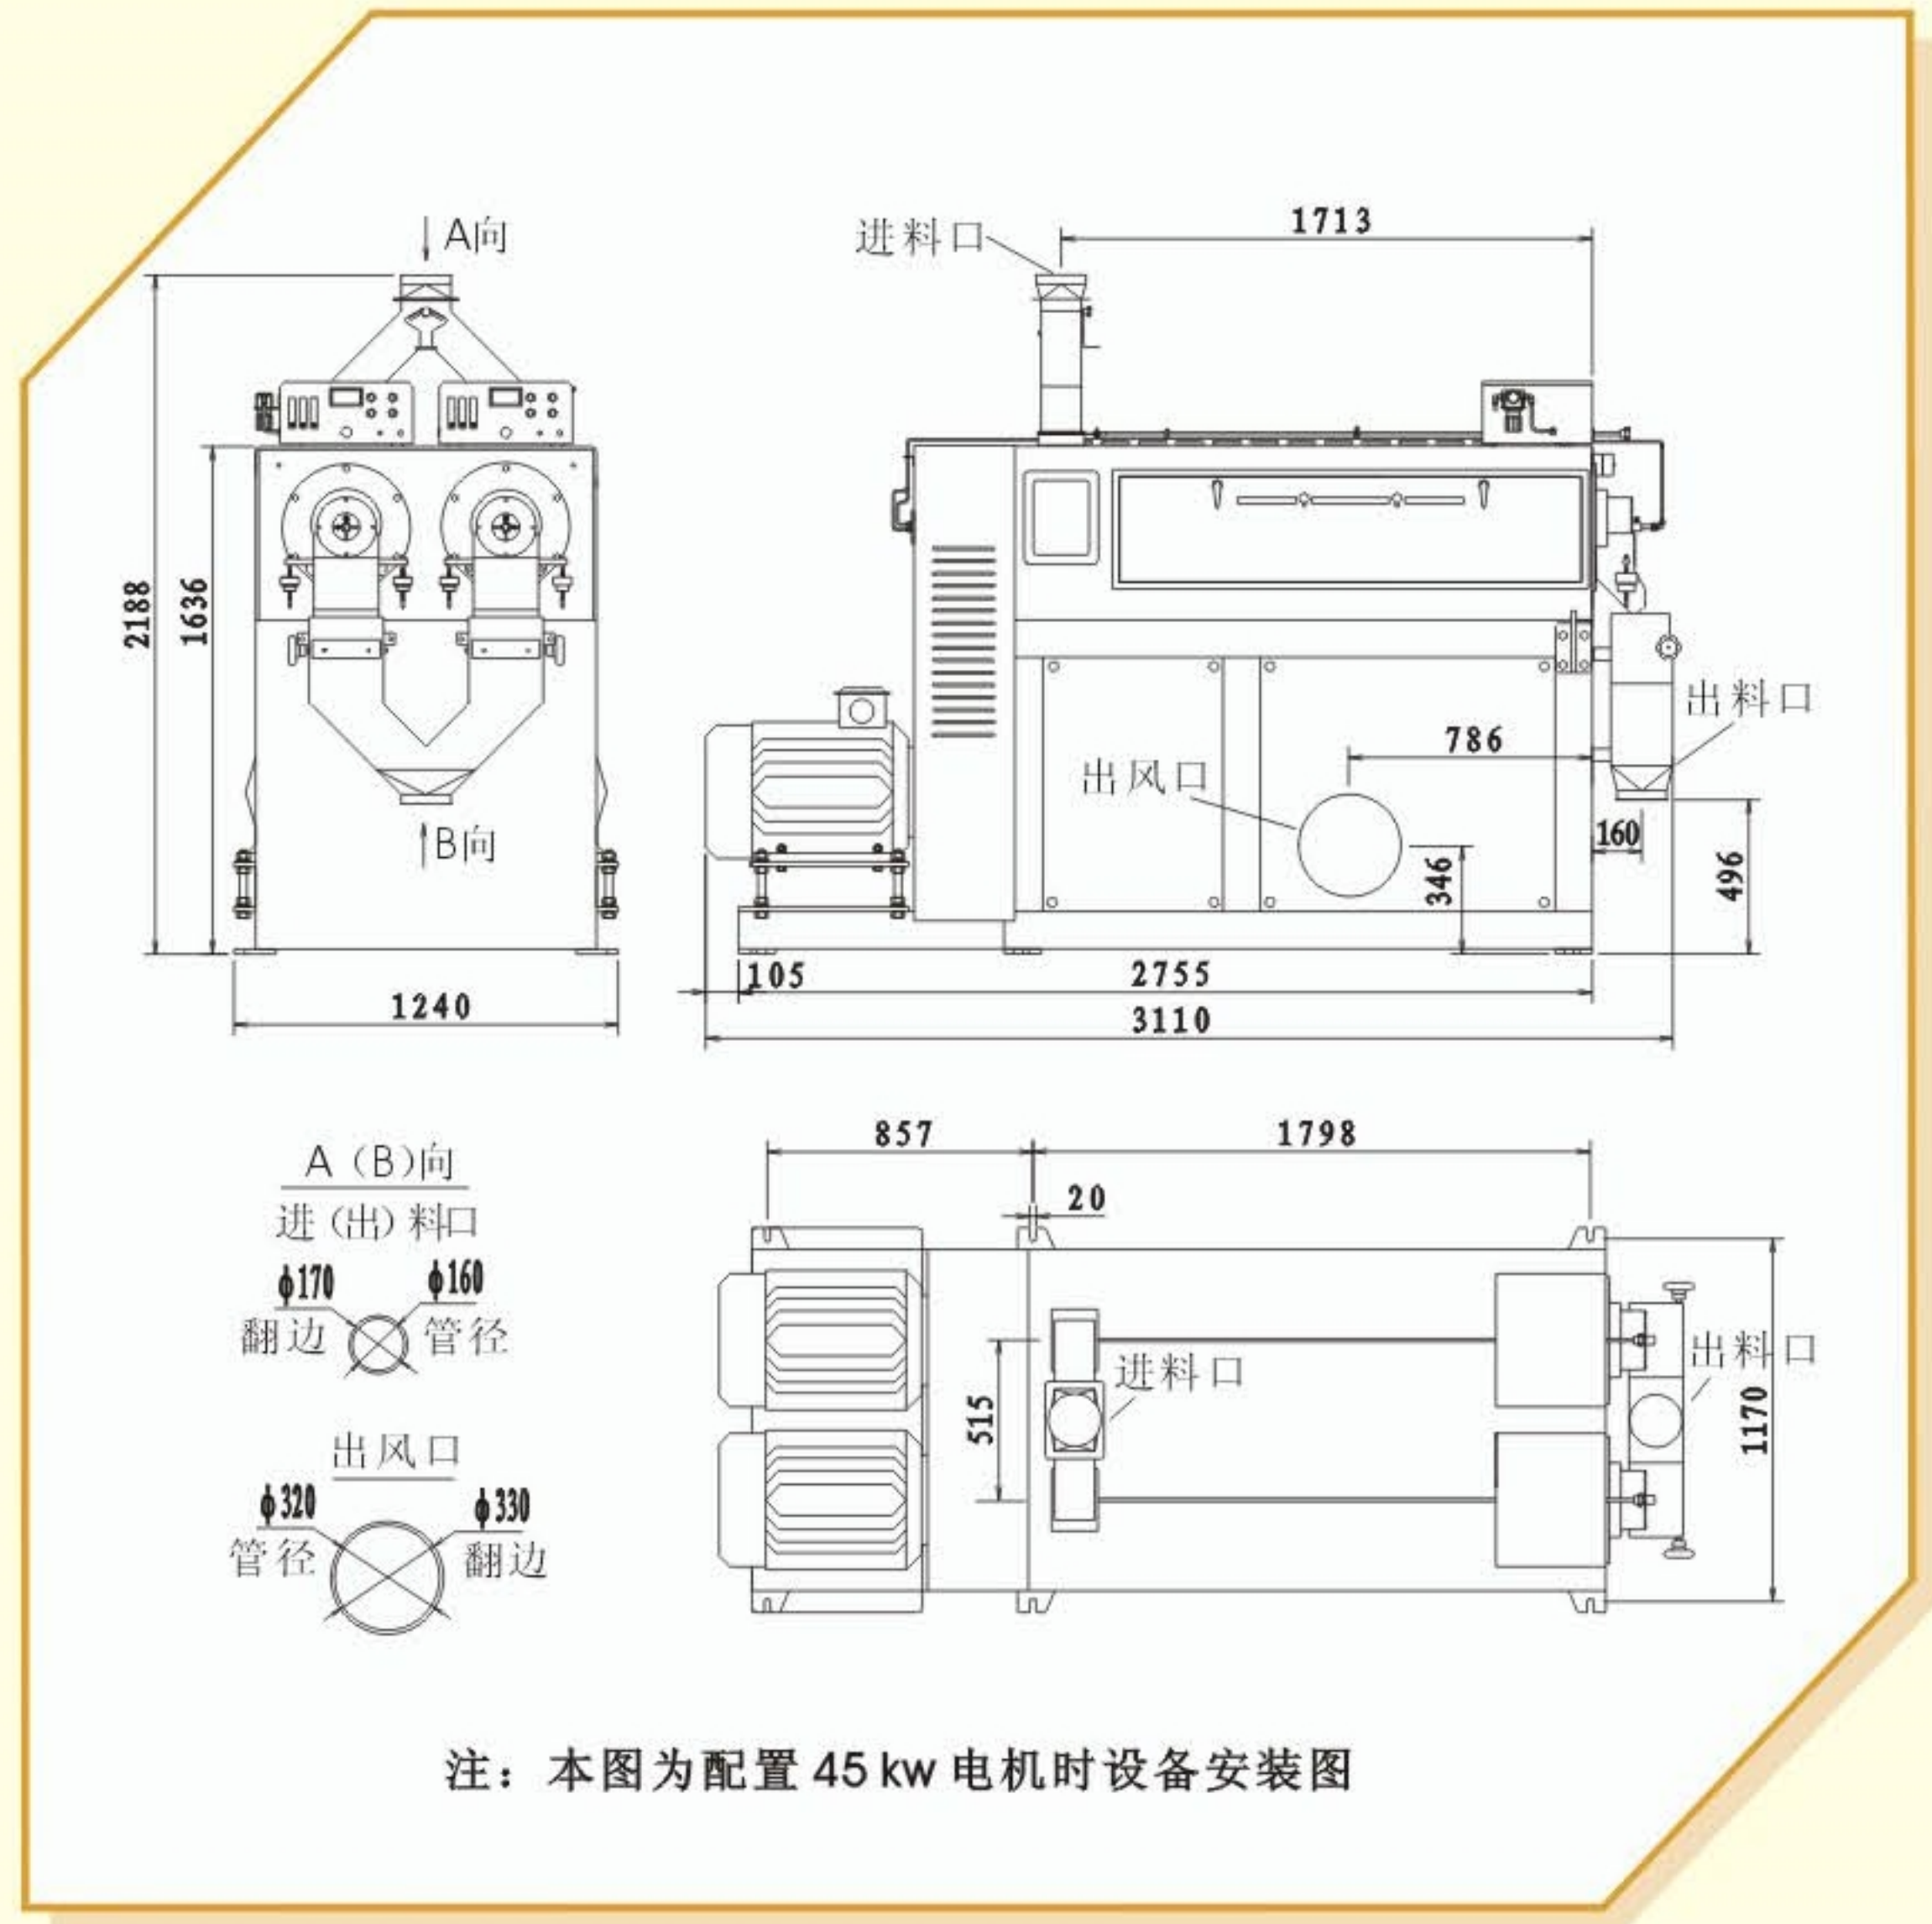

主要技术参数 MAIN TECHNICAL DATA

型 号Type	CM5000SX2L
处理量Output (t/h)	单机 (6-8) 多机串抛 (8-10)
主机动力Power (kw)	90-110
主轴转速Rotary speed (rpm)	750-850
负压 Negative pressure (mmH ₂ O)	300-350
风量Air volume (m ³ /min)	65-70
机重Weight (kg) (含45kw电机)	2730

通过ISO9001国际标准质量体系认证

E-mail: yongxiangmiji@sohu.com http://www.hbyxlj.com

地址：湖北省安陆市府河大道8号

ADD: 8 FUHE AVE.ANLU CITY,HUBEI,CHINA

电话(TEL): 0712-5254443 5254445 5258762 传真(FAX):0712-5254443 邮编(POSTCODE): 432600

CM5000SX2L 双辊大米抛光机
RICE POLISHER

二台含一台
省地又省钱

抛光零件为
食品级不锈钢

单机产量大
8-10吨/小时



湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

CM5000S×2L

双辊大米抛光机

DOUBLE ROLLS RICE POLISHER

用途简介 USE INTRODUCTION

CM5000S×2L 双辊大米抛光机是永祥集多年生产研发抛光机的专业技术和经验，融合现代大米抛光要求光洁、白亮的新理念，精心打造的新型双辊大米抛光机。

该机为双辊水平并联结构方式，双电机，单个抛光辊可以独立操作，集中风网系统（带关风器），同时，均匀进料，均匀出料，产量大（单机抛光可达6-7吨/小时，多机串抛可达8-10吨/小时）、结构紧凑（二台合一）、占地面积小，适合加工不同粒型籼稻粳稻，特别适合我国东北地区大型米厂大产量的要求，该机操作方便、性能稳定且坚固耐用，是现代品牌化、规模化米业公司理想的更新换代产品。



光滑耐磨的抛光辊



智能电流表与流量计



便于更换的筛托架



进口负压表

CM5000S × 2L double rolls rice polisher is a new type product integrated years of professional technology and experience in R & D and production and modern new notion of polishing of bright and white. Equipped with double rolls of parallel structure, dual motors, a single polishing roll can operate independently. The machine features centralized exhaust system (with airlock), meantime, feeding and discharging evenly, big capacity (6 - 7 tons / hour for one machine while 8-10 tons / hour for multi-machine), compact structure (Two in one) and covering small required area. It is suitable processing different grains like round-grained rice and long-shaped rice, especially for large output requirement of large-scale rice mills in Northeast China. Easy to operate, stable and durable, the machine is ideal replacement for branding, modernized large-scale rice company.

特点 FEATURE

- 占地面积小，二台合一，省地又省钱。
- 产量大，单机抛光6-7吨/小时，多机抛光8-10吨/小时。
- 抛光系统零件全部采用食品级不锈钢精心制造，既卫生，又耐用（寿命提高二倍以上），抛光后的大米洁白光亮，符合现代大米抛光新理念。
- 适合长粒米和短粒米抛光，对于我国东北各季大米抛光，既能长期稳定生产，又能减少米糠球（建议客户在抛光后安排筛选米糠球和色选并肩米糠球工艺）。
- 该机可以根据客户对产量的不同要求，配备功率不同的电机，有45kw和55kw两种配备。

- Two in one, saving space and money
- Large yield, single machine: 6-7 tons / hour, multi-machine: 8-10 tons / hour.
- Polishing parts are made of the food-grade stainless steel, safe sanitation and durable (more than twice of useful life). Polished rice become white and light, in accord with a new concept to modern rice polishing.
- Suitable for long-grain rice and short-grain rice polishing. For the rice of each season in Northeast China, it can maintain long-term stable production and reduce the rice bran. (suggestion: an arrangement for sieving and color sorting rice bran after polishing)
- The machine is equipped with motors either 45kw or 55kw according to the different requirements of production from customers.

风网系统 EXHAUST SYSTEM

