

双体重力谷糙分离机

PADDY SEPARATOR



单机产量大的 双体重力谷糙分离机

湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

用途简介

MGCZ70x25x2双体重力谷糙分离机是永祥根据国内稻米原料实际情况，结合多年生产重力谷糙分离机经验研发的新型谷糙分离设备。该机主要利用稻谷与糙米的比重不同，通过往复摇动特殊筛板，使稻谷与糙米的混合物分离为稻谷和糙米，本机具有分离能力强、保养维护简单等特点，能够大幅提高碾米加工的整米获得率，提升碾米企业的经济效益，是碾米加工过程的关键设备之一。

产品特点


- 特制平台机架，获得国家专利，结构紧凑，坚固耐用，保证双筛体稳定运行；
- 双筛体平衡一致性好，运行平稳，性能可靠；
- 特殊工艺制作专用筛板，分离效果好，适用范围广，单位筛理面积大，产量高；
- 设有根据有料无料自动启动或停机装置，自动化程度高，操作简便；
- 关键零部件采用国际名牌顶级配置，经久耐用。

USE INTRODUCTION

MGCZ70x25x2 paddy separator is designed and produced by Hubei Yongxiang Co.,Ltd. As paddy and brown rice's different weight, the machine takes that to divide grain into paddy and brown rice by backwards and forwards vibrating the sieve. It has features as strong separating effect, easy for maintenance. With high rate of head rice, it raises economic profits of rice factory. It is the key machine in rice milling line.

FEATURES

- Special made platform frame, impact structure, strong and durable, the double sieves run smoothly.
- The double sieves fit well, run smoothly, performance steady.
- Special process for sieve, good effect of separating wide range of application, big capacity.
- The auto -start -stop device makes sure there is no empty running situation. High degree of automation makes it easy to operate.
- Key spare parts come from famous international brands, which are more durable, steady and safe.

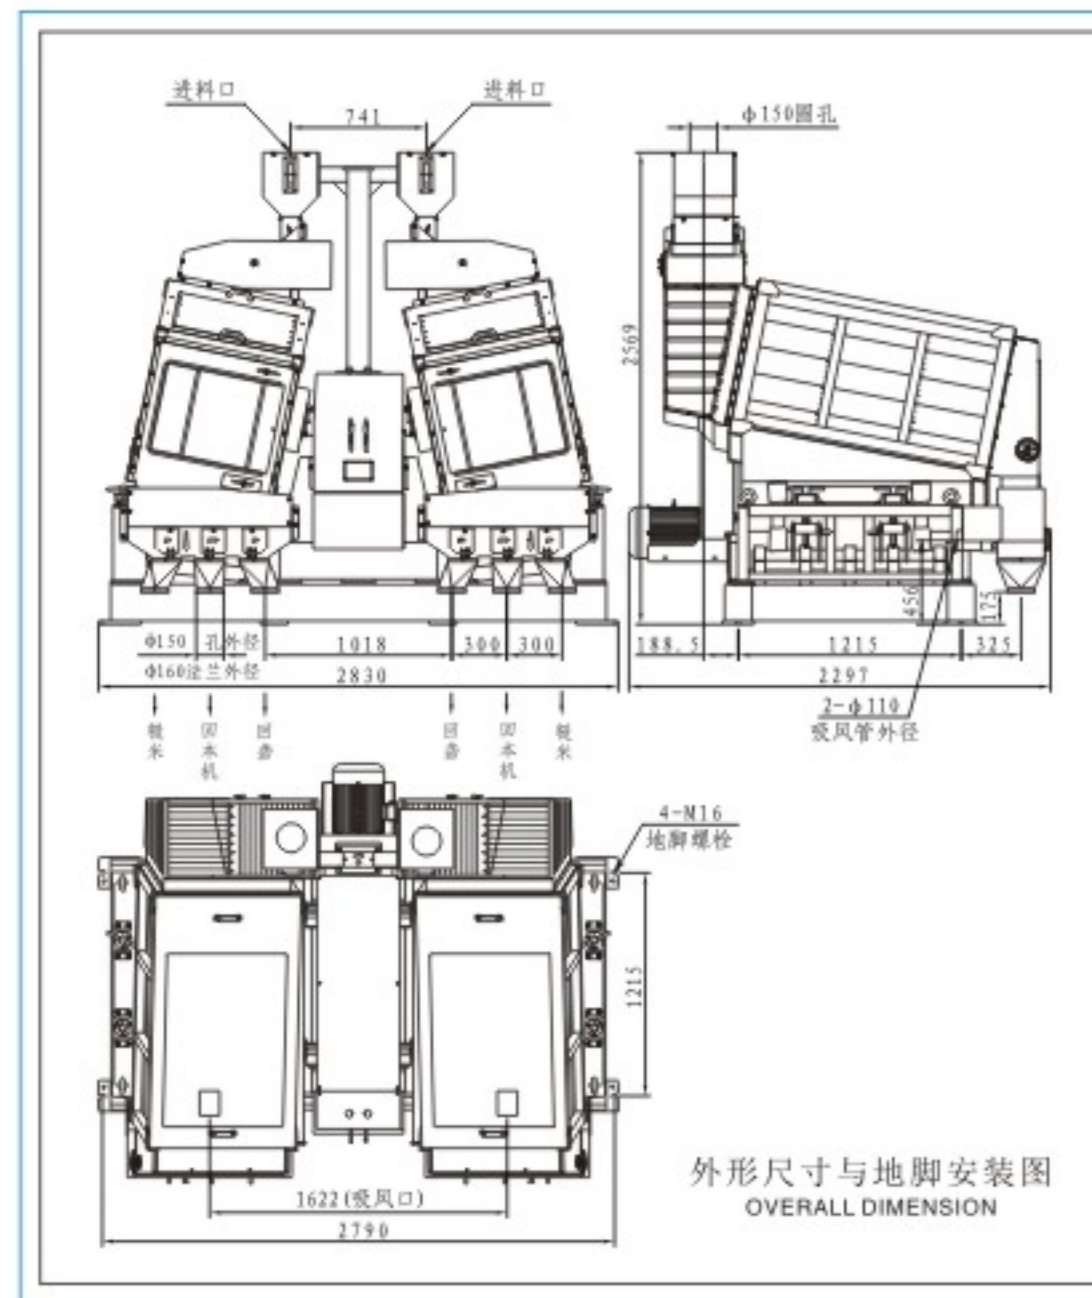

主要技术参数 MAIN TECHNICAL DATA

型号 Type	MGCZ70X25X2		
处理量 Output(t/h)	粳糙米15~22 籼糙米11~20	转速 Rotary speed(rpm)	295~305
配备动力 Power(kw)	7.5	吸风量 Air volume(m³/min)	(2.5-3)x2
机重 Weight(kg)	2500	外形尺寸 Dimension(mm)	2830X2297X2569

产品技术参数如有变更恕不另行通知 If technologic data has been changed without further information

通过ISO9001国际标准质量体系认证 ISO 9001-2008 Certified

E-mail: yongxiangmiji@sohu.com <http://www.hbyxlj.com>

地址：湖北省安陆市府河大道2号

ADD: 2 FUHE AVE. ANLU CITY, HUBEI, CHINA

电话(TEL): 0712-5254443 5254445 5258762 传真(FAX):0712-5254443 邮编(POSTCODE): 432600



永祥官网

微信公众号