

全自动大米抛光机

AUTOMATIC RICE POLISHER



型号 Type	CM6500C(QZD)
处理量 Output(t/h)	4.5 ~ 6.5
配备动力 Power(kw)	75
转速 Rotary speed(rpm)	895
吸风量 Air volume(m³/min)	70 ~ 80
负压 Negative pressure(mmH ₂ O)	250 ~ 350
外形尺寸 Dimension(mm)	2895x950x2265



微信公众号

湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.


用途简介 USE INTRODUCTION

CM6500C(QZD)全自动大米抛光机是永祥集多年研发生产大米抛光机的专业技术，融合现代大米绿色、健康新理念、新标准，精心设计、制造的新型大米抛光机。该机不仅具有结构紧凑、造型美观、单机产量大、占地面积小、适应能力强、坚固耐用等特点，而且采用触摸屏人机界面对话，操作控制便捷，全自动化设计，真正做到运行无人值守，能够满足大中型碾米企业与碾米机组配套使用或者深加工单独使用的需要，是现代品牌化、规模化米业公司理想的更新换代首选产品。

CM6500C (QZD) automatic rice polishing machine is YONGXIANG set many years of research and development of the production of rice polishing machine professional technology, integration of modern ricegreen Color health new concept new standards carefully designed and manufactured newrice polishing machineThis machine not only has a compact structure, beautiful appearance, single production Large volume, small footprint,strong adaptability, durability and other characteristics, and the use of touch screen man-machine interface dialogue,convenient operation and control. The automatic desian, truly unattended operation can meet the needs of large andmedium-sized rice milling enterprises and rice milling units for supporting use orfor deep processing alone, is the ideal replacement of the first choice of modern brand, large-scale rice companies.



控制界面
The control interface

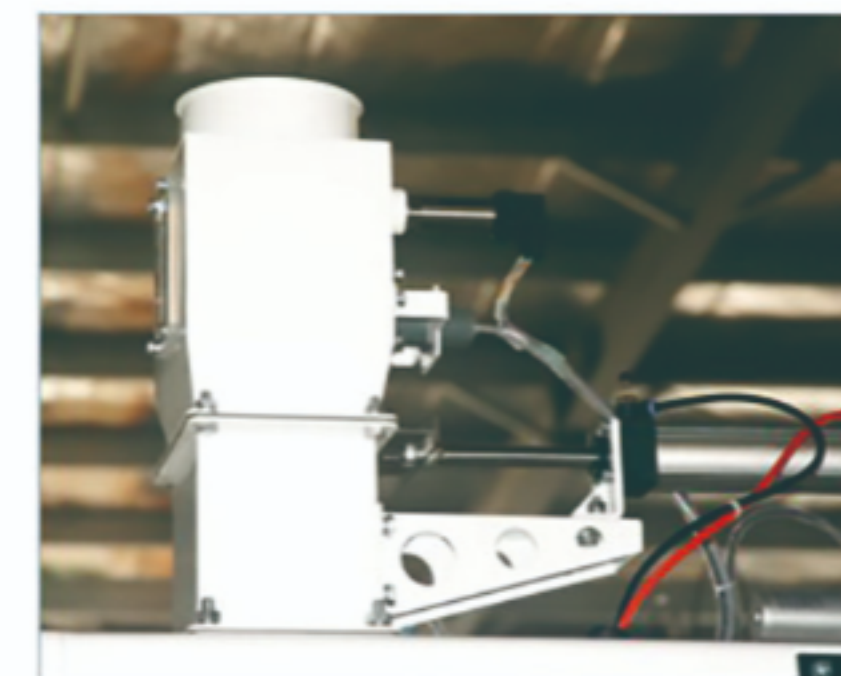

气动进料门与微调装置
Pneumatic feed door and fine-tuning device



镜面抛光辊
Mirror polishing roll



触摸屏
Touch screen



全新机架电机内置
A new frame Motor built-in

产品特点 FEATURES

- 本机全部运行工作过程通过触摸屏智能控制，人机界面对话，可以远程与米厂PLC通讯，远程操作，远程报警，无人值守；
- 镜面抛光辊筒，不易粘糠，减少增碎，提升抛光效果；
- 配备气动进料门并设有PLC控制的料门微调机构，开关迅速、精确灵敏；
- 集糠斗中配备传感器，能够监控抛光室工作状况，防止漏料；
- 出料斗配备水分检测系统，出料三通可将开机初始状态的大米清理；
- 全新机架设计，强弱电箱及水气箱分开，电线、水管等内置，排布规则美观，安全可靠，既节省空间又增加了设备的稳定性；
- 零部件采用国际名牌元件配置，经久耐用。

- The whole operation process of the machine through the touch screen intelligent control, human-machine interface dialogue, can be remote Communication with rice factory PLC, remote operation, remote alarm, unattended;
- Mirror polishing roller, not easy to stick bran, reduce crushing, improve polishing effect;
- Equipped with pneumatic feed door and with PLC control of the door fine-tuning mechanism, the switch is fast, accurate and sensitive;
- The chaff bucket is equipped with a sensor to monitor the working condition of the polishing room and prevent material leakage;
- The discharge hopper is equipped with moisture detection system, and the discharge tee can clean up the rice in the initial state of boot;
- New frame design, strong and weak electric box and water tank separate, wire, water pipe and other built-in, regular arrangement Beautiful, safe and reliable, saving space and increasing the stability of the equipment;
- The parts are equipped with international famous brand components, durable

CM6500C(QZD)

AUTOMATIC RICE POLISHER